FLEXITALY

FLESSIBILI
FLEXIBLE HOSES





FLESSIBILI DN 6 ACCIAIO INOX

FLESSIBILI PER RUBINETTERIA

STAINLESS STEEL DN 6 FLEXIBLES

FLEXIBLE HOSES FOR FAUCETS



DATI TECNICI - TECHNICAL DATA:


Tubo flessibile trecciato made in italy in acciaio Inox AISI 304 con interno in gomma alimentare EPDM utilizzato per il collegamento tra la rete idrica e la rubinetteria sanitaria. Grazie alle dimensioni molto ridotte e alla pressatura su tutta la lunghezza della bussola, questo flessibile favorisce l'installazione su rubinetterie di qualsiasi design, specialmente quelle con un design molto minimale con degli spazi tecnici ridotti o poco accessibili . Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy braided hose in AISI 304 stainless steel with internal in non-toxic EPDM rubber, used for the connection between the water mains and the sanitary fittings. Thanks to the very small size and the pressing all along the entire length of the sleeve, this hose facilitates the installation on faucets of any design, especially on those with a very minimal design with reduced engineering spaces or not very accessible. All the hoses are produced with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

APPLICAZIONI - APPLICATIONS



MATERIALI - MATERIALS

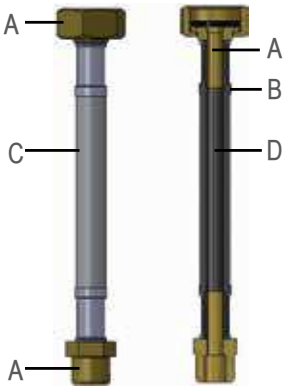

RACCORDI - FITTINGS:
A) Ottone CW614N e CW617N nichelato o giallo
Brass CW614N and CW617N nickel plated or yellow

BUSSOLE - SLEEVES:
B) Acciaio INOX AISI 304
Stainless steel AISI 304

TUBO - HOSE:
C) Treccia 6 fili in acciaio INOX AISI 304
6 Wires Braid in steel INOX AISI 304
D) Tubo interno: gomma EPDM atossico
Internal pipe EPDM rubber, atoxic

CRATTERISTICHE - FEATURES



TEMPERATURA INSTALLAZIONE - INSTALLATION TEMPERATURE:
Da -5°C a +90°C - From -5°C to +90°C



PRESSIONE D'ESERCIZIO - WORKING PRESSURE:
10 BAR



PORTATA A 3 BAR - FLOW RATE AT 3 BAR:
19 lit/min



TEMPERATURA D'IMPIEGO - WORKING TEMPERATURE:
-5°C - +90°C



FORO MINIMO PASSAGGIO D'ACQUA - FITTING INNER DIAMETER:
4,7 mm



RAGGIO CURVATURA MINIMO - MINIMUM BENDING RADIUS:
25 mm



Ø INTERNO - INNER Ø:
Ø 6 mm



Ø ESTERNO - OUTER Ø:
Ø 10 mm



108P12F

Flessibile in Acciaio Inox AISI 304 - DN6 M10x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN6 M10x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



108LP12F

Flessibile in Acciaio Inox AISI 304 - DN6 ML10x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN6 ML10x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



108P38F

Flessibile in Acciaio Inox AISI 304 - DN6 M10x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN6 M10x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



108LP38F

Flessibile in Acciaio Inox AISI 304 - DN6 ML10x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN6 ML10x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



1088D12F

Flessibile in Acciaio Inox AISI 304 - DN6 M8x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN6 M8x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



108L8D12F

Flessibile in Acciaio Inox AISI 304 - DN6 ML8x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN6 ML8x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



1088D38F

Flessibile in Acciaio Inox AISI 304 - DN6 M8x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN6 ML8x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



108L8D38F

Flessibile in Acciaio Inox AISI 304 - DN6 ML8x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN6 ML8x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100

FLESSIBILI DN 8 ACCIAIO INOX

FLESSIBILI PER RUBINETTERIA E SANITARI

STAINLESS STEEL DN 8 FLEXIBLES

FLEXIBLES FOR FAUCETS AND SANITARIES



DATI TECNICI - TECHNICAL DATA:


Tubo flessibile trecciato made in italy in acciaio Inox AISI 304 con interno in gomma alimentare EPDM utilizzato per il collegamento tra la rete idrica e la rubinetteria sanitaria o cassette W.C.e adatto a qualsisi altro impiego sanitario. Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy braided hose in AISI 304 stainless steel with internal in EPDM rubber, used for the connection between the water mains and the sanitary fittings or W.C. flushing tanks. All the hoses are produced with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

APPLICAZIONI - APPLICATIONS



MATERIALI - MATERIALS

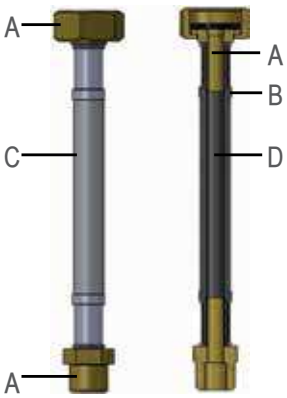

RACCORDI - FITTINGS:
A) Ottone CW614N e CW617N nichelato
Brass CW614N and CW617N nickel plated

BUSSOLE - SLEEVES:
B) Acciaio INOX AISI 304
Stainless steel AISI 304

TUBO - HOSE:
C) Treccia 7 fili in acciaio INOX AISI 304
7 Wires Braid in steel INOX AISI 304
D) Tubo interno: gomma EPDM atossico
Internal pipe EPDM rubber, atoxic

CRATTERISTICHE - FEATURES

TEMPERATURA INSTALLAZIONE - INSTALLATION TEMPERATURE:
Da -5°C a +90°C - From -5°C to +90°C

PRESSIONE D'ESERCIZIO - WORKING PRESSURE:
10 BAR

PORTATA A 3 BAR - FLOW RATE AT 3 BAR:
29 lit/min

TEMPERATURA D'IMPIEGO - WORKING TEMPERATURE:
-5°C - +90°C

FORO MINIMO PASSAGGIO D'ACQUA - FITTING INNER DIAMETER:
6 mm

RAGGIO CURVATURA MINIMO - MINIMUM BENDING RADIUS:
30 mm

Ø INTERNO - INNER Ø:
Ø 8 mm

Ø ESTERNO - OUTER Ø:
Ø 12 mm



10812F

Flessibile in Acciaio Inox AISI 304 - DN8 M10x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 M10x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



108L12F

Flessibile in Acciaio Inox AISI 304 - DN8 ML10x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 ML10x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



10838F

Flessibile in Acciaio Inox AISI 304 - DN8 M10x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 M10x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



108L38F

Flessibile in Acciaio Inox AISI 304 - DN8 ML10x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 ML10x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



108XL12F

Flessibile in Acciaio Inox AISI 304 -DN8 MXL10x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 MXL10x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



108XL38F

Flessibile in Acciaio Inox AISI 304 - DN8 MXL10x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 MXL10x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



10812D12F

Flessibile in Acciaio Inox AISI 304 - DN8 M12x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 M12x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



108L12D12F

Flessibile in Acciaio Inox AISI 304 - DN8 ML12x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 ML12x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



10812D38F

Flessibile in Acciaio Inox AISI 304 - DN8 M12x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 M12x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



108L12D38F

Flessibile in Acciaio Inox AISI 304 - DN8 ML12x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 ML12x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



108TB

Flessibile in Acciaio Inox AISI 304 - DN8 M10x1 - TB10 mm.
Stainless Steel Flexible hose AISI 304 - DN8 M10x1 - TB 10mm.

cm	20	25	30	35	40	45	50	60	80	100



108LTB

Flessibile in Acciaio Inox AISI 304 - DN8 ML10x1 - TB10 mm.
Stainless Steel Flexible hose AISI 304 - DN8 ML10x1 - TB10 mm.

cm	20	25	30	35	40	45	50	60	80	100

10812F12F



Flessibile in Acciaio Inox AISI 304 - DN8 1/2"F - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 1/2"F - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100

10812M12F



Flessibile in Acciaio Inox AISI 304 - DN8 1/2"M - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 1/2"M - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100

10838F38F



Flessibile in Acciaio Inox AISI 304 - DN8 3/8"F - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 3/8"F - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100

10838M38F



Flessibile in Acciaio Inox AISI 304 - DN8 3/8"M - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 3/8"M - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100

10812F38F



Flessibile in Acciaio Inox AISI 304 - DN8 1/2"F - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 1/2"F - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100

10812M38F



Flessibile in Acciaio Inox AISI 304 - DN8 1/2"M - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 1/2"M - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100

10838M12F



Flessibile in Acciaio Inox AISI 304 - DN8 3/8"M - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 3/8"M - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100

10810BTB



Flessibile in Acciaio Inox AISI 304 - DN8 10B - TB10 mm.
Stainless Steel Flexible hose AISI 304 - DN8 10B - TB10 mm.

cm	20	25	30	35	40	45	50	60	80	100

10810B12F



Flessibile in Acciaio Inox AISI 304 - DN8 10B - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 10B - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100

10810B38F



Flessibile in Acciaio Inox AISI 304 - DN8 10B - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 10B - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100

10810B12M



Flessibile in Acciaio Inox AISI 304 - DN8 10B - 1/2"M.
Stainless Steel Flexible hose AISI 304 - DN8 10B - 1/2"M.

cm	20	25	30	35	40	45	50	60	80	100

10810B38M



Flessibile in Acciaio Inox AISI 304 - DN8 10B - 3/8"M.
Stainless Steel Flexible hose AISI 304 - DN8 10B - 3/8"M.

cm	20	25	30	35	40	45	50	60	80	100

FLESSIBILI DN 10 ACCIAIO INOX

FLESSIBILI PER SANITARI

STAINLESS STEEL DN 10 FLEXIBLES

FLEXIBLES FOR SANITARIES



DATI TECNICI - TECHNICAL DATA:


Tubo flessibile trecciato made in italy in acciaio Inox AISI 304 con interno in gomma alimentare EPDM utilizzato prevalentemente per il collegamento tra la rete idrica e i rubinetti singoli, gli scaldabagni, le pareti doccia attrezzate e le vasche idromassaggio oltre che ai rubinetti posti sulle cucine industriali. Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy braided hose in AISI 304 stainless steel with internal in non-toxic EPDM rubber, mainly used for the connection between the water mains and the single faucet, the boilers, the equipped shower sets and the hydromassage tubs, besides the taps are placed on industrial kitchens. All the hoses are produced with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

APPLICAZIONI - APPLICATIONS



MATERIALI - MATERIALS

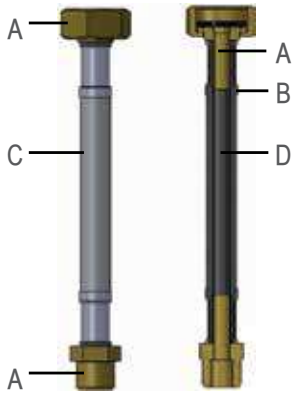

RACCORDI - FITTINGS:
A) Ottone CW614N e CW617N nichelato
Brass CW614N and CW617N nickel plated

BUSSOLE - SLEEVES:
B) Acciaio INOX AISI 304
Stainless steel AISI 304

TUBO - HOSE:
C) Treccia 7-8 fili in acciaio INOX AISI 304
7-8 Wires Braid in steel INOX AISI 304
D) Tubo interno: gomma EPDM atossico
Internal pipe EPDM rubber, atoxic

CRATTERISTICHE - FEATURES

TEMPERATURA INSTALLAZIONE - INSTALLATION TEMPERATURE:
Da -5°C a +90°C - From -5°C to +90°C

PRESSIONE D'ESERCIZIO - WORKING PRESSURE:
10 BAR

PORTATA A 3 BAR - FLOW RATE AT 3 BAR:
42 lit/min

TEMPERATURA D'IMPIEGO - WORKING TEMPERATURE:
-5°C - +90°C

FORO MINIMO PASSAGGIO D'ACQUA - FITTING INNER DIAMETER:
7 mm

RAGGIO CURVATURA MINIMO - MINIMUM BENDING RADIUS:
30 mm

Ø INTERNO - INNER Ø:
Ø 10 mm

Ø ESTERNO - OUTER Ø:
Ø 14 mm

10012F12F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"F - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"F - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100

10012M12F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"M - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"M - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100

10038F38F



Flessibile in Acciaio Inox AISI 304 - DN10 3/8"F - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8"F - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100

10038M38F



Flessibile in Acciaio Inox AISI 304 - DN10 3/8"M - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8"M - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100

10012F38F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"F - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"F - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100

10038M12F



Flessibile in Acciaio Inox AISI 304 - DN10 3/8"M - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8"M - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100

10012M38F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"M - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"M - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100

10034M12F



Flessibile in Acciaio Inox AISI 304 - DN10 3/4"M - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/4"M - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100

10012F34F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"F - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"F - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100

10012M34F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"M - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"M - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100

10034F34F



Flessibile in Acciaio Inox AISI 304 - DN10 3/4"F - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/4"F - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100

10034M34F



Flessibile in Acciaio Inox AISI 304 - DN10 3/4"M - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/4"M - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100

100C12F12F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"F - 1/2"FC.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"F - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100

100C12M12F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"M - 1/2"FC.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"M - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100

100C12F34F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"F - 3/4"FC.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"F - 3/4"FC.

cm	20	25	30	35	40	45	50	60	80	100

100C12M34F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"M - 3/4"FC.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"M - 3/4"FC.

cm	20	25	30	35	40	45	50	60	80	100



100C34F12F

Flessibile in Acciaio Inox AISI 304 - DN10 3/4"F - 1/2"FC.
Stainless Steel Flexible hose AISI 304 - DN10 3/4"F - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100



100C34M12F

Flessibile in Acciaio Inox AISI 304 - DN10 3/4"M - 1/2"FC.
Stainless Steel Flexible hose AISI 304 - DN10 3/4"M - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100



100C38F12F

Flessibile in Acciaio Inox AISI 304 - DN10 3/8"F - 1/2"FC.
Stainless Steel Flexible hose AISI 304 - DN10 3/8"F - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100
€	6,30	6,40	6,60	6,80	7,00	7,10	7,30	7,90	8,60	9,40



100C38M12F

Flessibile in Acciaio Inox AISI 304 DN10 - 3/8"M - 1/2"FC.
Stainless Steel Flexible hose AISI 304 DN10 - 3/8"M - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100
€	6,30	6,40	6,60	6,80	7,00	7,10	7,30	7,90	8,60	9,40



100C34F34F

Flessibile in Acciaio Inox AISI 304 - DN10 3/4"F - 3/4"FC.
Stainless Steel Flexible hose AISI 304 - DN10 3/4"F - 3/4"FC.

cm	20	25	30	35	40	45	50	60	80	100



100C34M34F

Flessibile in Acciaio Inox AISI 304 - DN10 3/4"M - 3/4"FC.
Stainless Steel Flexible hose AISI 304 - DN10 3/4"M - 3/4"FC.

cm	20	25	30	35	40	45	50	60	80	100



10312M12F

Flessibile in Acciao Inox AISI 304 - DN10 1/2"ML - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"ML - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



10338M38F

Flessibile in Acciao Inox AISI 304 - DN10 3/8"ML - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8"ML - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



10338M12F

Flessibile in Acciao Inox AISI 304 - DN10 3/8"ML - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8"ML - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



10312M38F

Flessibile in Acciao Inox AISI 304 - DN10 1/2"ML - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"ML - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



10612F

Flessibile in Acciao Inox AISI 304 - DN10 10B - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100



10612M

Flessibile in Acciao Inox AISI 304 - DN10 10B - 1/2"M.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 1/2"M.

cm	20	25	30	35	40	45	50	60	80	100



10638F

Flessibile in Acciao Inox AISI 304 - DN10 10B - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100



10638M

Flessibile in Acciao Inox AISI 304 - DN10 10B - 3/8"M.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 3/8"M.

cm	20	25	30	35	40	45	50	60	80	100

FLESSIBILI DN 13 ACCIAIO INOX

FLESSIBILI PER SCALADABAGNO, CALDAIE ED ELETTRODOMESTICI

STAINLESS STEEL DN 13 FLEXIBLES

FLEXIBLES HOSES FOR WATER HEATERS, BOILERS AND HOUSEHOLD APPLIANCES



DATI TECNICI - TECHNICAL DATA:


Tubo flessibile trecciato made in italy in acciaio Inox AISI 304 con interno in gomma alimentare EPDM utilizzato prevalentemente per il collegamento tra la rete idrica e i rubinetti singoli, gli scaldabagni, le pareti doccia attrezzate e le vasche idromassaggio oltre che ai rubinetti posti sulle cucine industriali. Tutti i flessibili sono raccordati con macchine automatiche ed il risultato e' l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy braided hose in AISI 304 stainless steel with internal in non-toxic EPDM rubber, mainly used for the connection between the water mains and the single faucet, the boilers, the equipped shower sets and the hydromassage tubs, besides the taps are placed on industrial kitchens. All the hoses are produced with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

APPLICAZIONI - APPLICATIONS



MATERIALI - MATERIALS

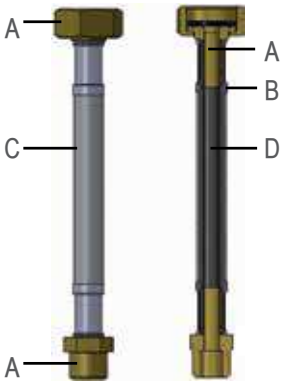

RACCORDI - FITTINGS:

A) CW617N nichelato o giallo
Brass CW617N nickel plated or yellow

BUSSOLE - SLEEVES:

B) Acciaio INOX AISI 304
Stainless steel AISI 304

TUBO - HOSE:

C) Treccia 9 fili in acciaio INOX AISI 304
9 Wires Braid in steel INOX AISI 304

D) Tubo interno: gomma EPDM atossico
Internal pipe EPDM rubber, atoxic

CRATTERISTICHE - FEATURES

TEMPERATURA INSTALLAZIONE - INSTALLATION TEMPERATURE:

Da -5°C a +90°C - From -5°C to +90°C

PRESSIONE D'ESERCIZIO - WORKING PRESSURE:

16 BAR

PORTATA A 3 BAR - FLOW RATE AT 3 BAR:

65 lit/min

TEMPERATURA D'IMPIEGO - WORKING TEMPERATURE:

-5°C - +90°C

FORO MINIMO PASSAGGIO D'ACQUA - FITTING INNER DIAMETER:

9,3 mm

RAGGIO CURVATURA MINIMO - MINIMUM BENDING RADIUS:

45 mm

Ø INTERNO - INNER Ø:

Ø 13 mm

Ø ESTERNO - OUTER Ø:

Ø 18 mm

11612F12F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2"F - 1/2"F
Stainless Steel Flexible hose AISI 304 - DN13 1/2"F - 1/2"F

cm	20	25	30	35	40	45	50	60	80	100

11612M12F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2"M - 1/2"F
Stainless Steel Flexible hose AISI 304 - DN13 1/2"M - 1/2"F

cm	20	25	30	35	40	45	50	60	80	100



11634F34F

Flessibile in Acciaio Inox AISI 304 - DN13 3/4"F - 3/4"F

Stainless Steel Flexible hose AISI 304 - DN13 3/4"F - 3/4"F

cm	20	25	30	35	40	45	50	60	80	100



11634M34F

Flessibile in Acciaio Inox AISI 304 - DN13 3/4"M - 3/4"F

Stainless Steel Flexible hose AISI 304 - DN13 3/4"M - 3/4"F

cm	20	25	30	35	40	45	50	60	80	100



11612F34F

Flessibile in Acciaio Inox AISI 304 - DN13 1/2"F - 3/4"F

Stainless Steel Flexible hose AISI 304 - DN13 1/2"F - 3/4"F

cm	20	25	30	35	40	45	50	60	80	100



11612M34F

Flessibile in Acciaio Inox AISI 304 - DN13 1/2"M - 3/4"F

Stainless Steel Flexible hose AISI 304 - DN13 1/2"M - 3/4"F

cm	20	25	30	35	40	45	50	60	80	100



11634M12F

Flessibile in Acciaio Inox AISI 304 - DN13 3/4"M - 1/2"F

Stainless Steel Flexible hose AISI 304 - DN13 3/4"M - 1/2"F

cm	20	25	30	35	40	45	50	60	80	100



116C12F12F

Flessibile in Acciaio Inox AISI 304 - DN13 1/2"F - 1/2"FC

Stainless Steel Flexible hose AISI - 304 DN13 1/2"F - 1/2"FC

cm	20	25	30	35	40	45	50	60	80	100



116C12M12F

Flessibile in Acciaio Inox AISI 304 - DN13 1/2"M - 1/2"FC

Stainless Steel Flexible hose AISI 304 - DN13 1/2"M - 1/2"FC

cm	20	25	30	35	40	45	50	60	80	100



116C34F34F

Flessibile in Acciaio Inox AISI 304 - DN13 3/4"F - 3/4"FC

Stainless Steel Flexible hose AISI 304 - DN13 3/4"F - 3/4"FC

cm	20	25	30	35	40	45	50	60	80	100



116C34M34F

Flessibile in Acciaio Inox AISI 304 - DN13 3/4"M - 3/4"FC

Stainless Steel Flexible hose AISI 304 - DN13 3/4"M - 3/4"FC

cm	20	25	30	35	40	45	50	60	80	100



116C12F34F

Flessibile in Acciaio Inox AISI 304 - DN13 1/2"F - 3/4"FC

Stainless Steel Flexible hose AISI 304 - DN13 1/2"F - 3/4"FC

cm	20	25	30	35	40	45	50	60	80	100



116C12M34F

Flessibile in Acciaio Inox AISI 304 - DN13 1/2"M - 3/4"FC

Stainless Steel Flexible hose AISI 304 - DN13 1/2"M - 3/4"FC

cm	20	25	30	35	40	45	50	60	80	100



116C34F12F

Flessibile in Acciaio Inox AISI 304 - DN13 3/4"F - 1/2"FC

Stainless Steel Flexible hose AISI 304 - DN13 3/4"F - 1/2"FC

cm	20	25	30	35	40	45	50	60	80	100

FLESSIBILI ANTIVIBRANTI
IN ACCIAIO ZINCATO

ANTI-VIBRATION FLEXIBLES
IN GALVANIZED STEEL



DATI TECNICI - TECHNICAL DATA:


Flessibili antivibranti made in italy rivestiti con treccia in Acciaio Zincato ed interno in tubo in gomma alimentare EPDM utilizzati per il collegamento tra la rete idrica e pompe, caldaie, autoclavi e depuratori, sono disponibili nelle misure da 1/2" fino a 2". Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy anti-vibration flexible hoses, galvanized steel braided, with internal in non-toxic EPDM rubber, used for the connection between the water mains and pumps, boilers, autoclaves and water conditioner; available from 1/2" to 2" size. All the hoses are connected with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

APPLICAZIONI - APPLICATIONS



MATERIALI - MATERIALS

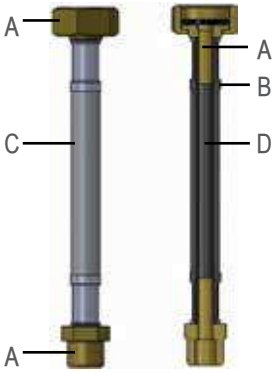

RACCORDI - FITTINGS:
A) Ottone CW614N e CW617N giallo o nichelato
Brass CW614N and CW617N yellow or nickel plated

BUSSOLE - SLEEVES:
B) Alluminio 99,5%
Alluminium 99,5%

TUBO - HOSE:
C) Treccia in Acciaio Zincato
wires braid n stainless steel galvanized
D) Tubo interno: gomma EPDM atossico
Internal pipe EPDM rubber, atoxic

CRATTERISTICHE - FEATURES

DN 13 - 1/2"	DN 19 - 3/4"	DN 25 - 1"	DN 32 1" 1/4	DN 40 - 1" 1/2	DN 50 2"
PRESSIONE D'ESERCIZIO - WORKING PRESSURE:					
10 BAR	10 BAR	10 BAR	6 BAR	6 BAR	4 BAR
PORTATA A 3 BAR - FLOW RATE AT 3 BAR:					
120 lit/min	120 lit/min	200 lit/min	400 lit/min	700 lit/min	1.050 lit/min
TEMPERATURA D'IMPIEGO - WORKING TEMPERATURE:					
-10°C +90°C	-10°C +90°C	-10°C +90°C	-10°C +90°C	-10°C +90°C	-10°C +90°C
FORO MINIMO PASSAGGIO D'ACQUA - FITTING INNER DIAMETER:					
9,3 mm	15 mm	20 mm	26 mm	32 mm	41 mm
RAGGIO CURVATURA MINIMO - MINIMUM BENDING RADIUS:					
45 mm	70 mm	100 mm	190 mm	230 mm	300 mm
Ø INTERNO - INNER Ø:					
Ø 13 mm	Ø 19 mm	Ø 25 mm	Ø 30 mm	Ø 40 mm	Ø 50 mm
Ø ESTERNO - OUTER Ø:					
Ø 19 mm	Ø 27 mm	Ø 33 mm	Ø 42 mm	Ø 52 mm	Ø 62 mm

FLESSIBILE IN ACCIAIO ZINCATO E RACCORDI IN OTTONE GIALLO



Flessibile in Acciaio zincato e raccordo in ottone giallo.
Galvanized Steel Flexible hose and yellow brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
44212	DN13	1/2"M - 1/2"F
44234	DN19	3/4"M - 3/4"F
44210	DN25	1"M - 1"F
442114	DN32	1"1/4M - 1"1/4F
442112	DN40	1"1/2M - 1"1/2F
44220	DN50	2"M - 2"F



Flessibile in Acciaio zincato e raccordo in ottone giallo.
Galvanized Steel Flexible hose and yellow brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
442C12	DN13	1/2"M - 1/2"FC
442C34	DN19	3/4"M - 3/4"FC
442C10	DN25	1"M - 1"FC

GALVANIZED STEEL FLEXIBLE HOSE AND YELLOW BRASS FITTINGS



Flessibile in Acciaio zincato e raccordo in ottone giallo.
Galvanized Steel Flexible hose and yellow brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
442FF12	DN13	1/2"F - 1/2"F
442FF34	DN19	3/4"F - 3/4"F
442FF10	DN25	1"F - 1"F
442FF114	DN32	1"1/4F - 1"1/4F
442FF112	DN40	1"1/2F - 1"1/2F
442FF20	DN50	2"F - 2"F



Flessibile in Acciaio zincato e raccordo in ottone giallo.
Galvanized Steel Flexible hose and yellow brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
442FC12	DN13	1/2"F - 1/2"FC
442FC34	DN19	3/4"F - 3/4"FC
442FC10	DN25	1"F - 1"FC

FLESSIBILE IN ACCIAIO ZINCATO E RACCORDI IN OTTONE NICHELATO



Flessibile in Acciaio zincato e raccordo in ottone nichelato.
Galvanized Steel Flexible hose and nickel plated brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
44112	DN13	1/2"M - 1/2"F
44134	DN19	3/4"M - 3/4"F
44110	DN25	1"M - 1"F
441114	DN32	1"1/4M - 1"1/4F
441112	DN40	1"1/2M - 1"1/2F
44120	DN50	2"M - 2"F



Flessibile in Acciaio zincato e raccordo in ottone nichelato.
Galvanized Steel Flexible hose and nickel plated brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
441C12	DN13	1/2"M - 1/2"FC
441C34	DN19	3/4"M - 3/4"FC
441C10	DN25	1"M - 1"FC

GALVANIZED STEEL FLEXIBLE HOSE AND NICKEL-PLATED BRASS FITTINGS



Flessibile in Acciaio zincato e raccordo in ottone nichelato.
Galvanized Steel Flexible hose and nickel plated brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
441FF12	DN13	1/2"F - 1/2"F
441FF34	DN19	3/4"F - 3/4"F
441FF10	DN25	1"F - 1"F
441FF114	DN32	1"1/4F - 1"1/4F
441FF112	DN40	1"1/2F - 1"1/2F
441FF20	DN50	2"F - 2"F



Flessibile in Acciaio zincato e raccordo in ottone nichelato.
Galvanized Steel Flexible hose and nickel plated brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
441FC12	DN13	1/2"F - 1/2"FC
441FC34	DN19	3/4"F - 3/4"FC
441FC10	DN25	1"F - 1"FC

FLESSIBILI ANTIVIBRANTI INOX

TRECCIA IN ACCIAIO INOX PER POMPE E AUTOCLAVI

STAINLESS STEEL ANTI-VIBRATION FLEXIBLES

STAINLESS STEEL BRAIDED FOR PUMPS AND AUTOCLAVES



DATI TECNICI - TECHNICAL DATA:


Flessibili antivibranti made in italy rivestiti con treccia in Acciaio Inox AISI 304 ed interno in tubo in gomma alimentare EPDM utillizzati per il collegamento tra la rete idrica e pompe, caldaie, autoclavi e depuratori, sono disponibili nelle misure da 1/2" fino a 2". Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy anti-vibration flexible hoses, AISI 304 stainless steel braided, with internal in non-toxic EPDM rubber, used for the connection between the water mains and pumps, boilers, autoclaves and water conditioner; available from 1/2" to 2" size. All the hoses are connected with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

APPLICAZIONI - APPLICATIONS



MATERIALI - MATERIALS

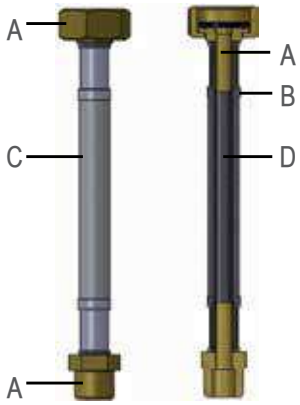

RACCORDI - FITTINGS:
A) Ottone CW614N e CW617N giallo o nichelato
Brass CW614N and CW617N yellow or nickel plated

BUSSOLE - SLEEVES:
B) Alluminio 99,5%
Alluminium 99,5%

TUBO - HOSE:
C) Treccia in Acciaio AISI 304
Braid in Steel AISI 304
D) Tubo interno: gomma EPDM atossico
Internal pipe EPDM rubber, atoxic

CRATTERISTICHE - FEATURES

DN 13 - 1/2"	DN 19 - 3/4"	DN 25 - 1"	DN 32 1" 1/4	DN 40 - 1" 1/2	DN 50 2"
PRESSIONE D'ESERCIZIO - WORKING PRESSURE:					
15 BAR	15 BAR	15 BAR	9 BAR	6 BAR	7 BAR
PORTATA A 3 BAR - FLOW RATE AT 3 BAR:					
65 lit/min	120 lit/min	200 lit/min	400 lit/min	700 lit/min	1.050 lit/min
TEMPERATURA D'IMPIEGO - WORKING TEMPERATURE:					
-10°C +90°C	-10°C +90°C	-10°C +90°C	-10°C +90°C	-10°C +90°C	-10°C +90°C
FORO MINIMO PASSAGGIO D'ACQUA - FITTING INNER DIAMETER:					
9,3 mm	15 mm	20 mm	25 mm	32 mm	40 mm
RAGGIO CURVATURA MINIMO - MINIMUM BENDING RADIUS:					
45 mm	70 mm	100 mm	190 mm	230 mm	300 mm
Ø INTERNO - INNER Ø:					
Ø 13 mm	Ø 19 mm	Ø 25 mm	Ø 30 mm	Ø 40 mm	Ø 50 mm
Ø ESTERNO - OUTER Ø:					
Ø 19 mm	Ø 27 mm	Ø 33 mm	Ø 42 mm	Ø 52 mm	Ø 62 mm

FLESSIBILE IN ACCIAIO INOX AISI 304 E RACCORDI IN OTTONE NICHELATO



Flessibile in Acciaio INOX AISI 304 e raccordo in ottone nichelato.
Stainless Steel Flexible hose AISI 304 and nickel-plated brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
44312	DN13	1/2"M - 1/2"F
44334	DN19	3/4"M - 3/4"F
44310	DN25	1"M - 1"F



Flessibile in Acciaio INOX AISI 304 e raccordo in ottone nichelato.
Stainless Steel Flexible hose AISI 304 and nickel-plated brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
443C12	DN13	1/2"M - 1/2"FC
443C34	DN19	3/4"M - 3/4"FC
443C10	DN25	1"M - 1"FC

STAINLESS STEEL FLEXIBLE HOSE AISI 304 AND NICKEL-PLATED BRASS FITTINGS



Flessibile in Acciaio INOX AISI 304 e raccordo in ottone nichelato.
Stainless Steel Flexible hose AISI 304 and nickel-plated brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
443FF12	DN13	1/2"F - 1/2"F
443FF34	DN19	3/4"F - 3/4"F
443FF10	DN25	1"F - 1"F



Flessibile in Acciaio INOX AISI 304 e raccordo in ottone nichelato.
Stainless Steel Flexible hose AISI 304 and nickel-plated brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
443FC12	DN13	1/2"F - 1/2"FC
443FC34	DN19	3/4"F - 3/4"FC
443FC10	DN25	1"F - 1"FC

FLESSIBILE IN ACCIAIO INOX AISI 304 E RACCORDI IN OTTONE GIALLO



Flessibile in Acciaio INOX AISI 304 e raccordo in ottone giallo.
Stainless Steel Flexible hose AISI 304 and yellow brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
44412	DN13	1/2"M - 1/2"F
44434	DN19	3/4"M - 3/4"F
44410	DN25	1"M - 1"F



Flessibile in Acciaio INOX AISI 304 e raccordo in ottone giallo.
Stainless Steel Flexible hose AISI 304 and yellow brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
444C12	DN13	1/2"M - 1/2"FC
444C34	DN19	3/4"M - 3/4"FC
444C10	DN25	1"M - 1"FC

STAINLESS STEEL FLEXIBLE HOSE AISI 304 AND YELLOW BRASS FITTINGS



Flessibile in Acciaio INOX AISI 304 e raccordo in ottone giallo.
Stainless Steel Flexible hose AISI 304 and yellow brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
444FF12	DN13	1/2"F - 1/2"F
444FF34	DN19	3/4"F - 3/4"F
444FF10	DN25	1"F - 1"F



Flessibile in Acciaio INOX AISI 304 e raccordo in ottone giallo.
Stainless Steel Flexible hose AISI 304 and yellow brass fittings.

ART.	TUBO - HOSE	RACCORDI - FITTINGS
444FC12	DN13	1/2"F - 1/2"FC
444FC34	DN19	3/4"F - 3/4"FC
444FC10	DN25	1"F - 1"FC

TUBI DI RAME - COPPER TUBES



Tubo in rame ricotto cromato in barre da 5 metri Ø10 mm.
Pipe in soft copper chrome plated in roll of 5 meters, Ø10 mm.

11110ROT5



Tubo in rame ricotto cromato in barre da 5 metri Ø12 mm.
Pipe in soft copper chrome plated in roll of 5 meters, Ø12 mm.

11112ROT5



Tubo in rame ricotto cromato in barre da 5 metri Ø14 mm.
Pipe in soft copper chrome plated in roll of 5 meters, Ø14 mm.

11114ROT5

Tubo in rame ricotto cromato in barre da 1,5 metro Ø10 mm.
Pipe in soft copper chrome plated in roll of 1,5 meter, Ø10 mm.

11110150

Tubo liscio in rame cromato Ø10 mm con attacco filettato 10M x 1.
C.p. copper pipe Ø10 mm threated 10M x 1.

	cm
114M1035	35
114M1045	45
114M1050	50
114M1060	60



Tubo liscio in rame cromato Ø10 mm con cartella e dado.
C.p. copper pipe Ø10 mm with nut.

	cm	
1141230	30	1/2
1141235	35	1/2
1141240	40	1/2
1141250	50	1/2
1143830	30	3/8
1143835	35	3/8
1143840	40	3/8
1143850	50	3/8

Tubo in rame ricotto cromato in barre da 1 metro Ø10 mm.
Pipe in soft copper chrome plated in roll of 1 meter, Ø10 mm.

11110100



Tubo liscio in rame cromato Ø10 mm con attacco dado e bicono Ø10 mm. cm 35.
C.p. copper pipe Ø10 mm with nut and 3 pcs washers Ø10 mm. cm 35.

114F1035