
AGAflex Sp. z o.o.
Sierakowo 108, 06-300 Przasnysz
www.agaflex.pl
Polub nas na Facebooku



Technical data card: repair clamps



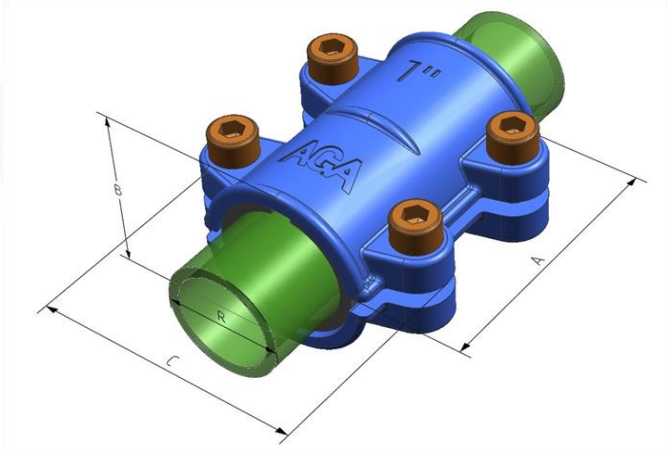

Catalog No	DN	Pipe size application	A [mm]	B [mm]	C [mm]
11010010	10	3/8"	75	37	60
11010001	15	1/2"	75	37	60
11010002	20	3/4"	75	43	68
11010002n	20	3/4"	75	43	73
11010003	25	1"	75	50	74
11010004	32	1 1/4"	85	62	86
11010005	40	1 1/2"	105	71	93
11010006	50	2"	105	85	110
11010007	65	2 1/2"	105	103	138
11010008	80	3"	105	117	150
11010009	100	4"	125	145	182

TÜVRheinland CERTYFIKOWANO
System zarządzania ISO 9001:2015
www.tuv.com ID 9105059711

tel. +48 29 746 33 80, +48 29 691 70 94
e-mail: biuro@agaflex.pl

AGAflex Sp. z o.o.
Sierakowo 108, 06-300 Przasnysz
www.agaflex.pl
Polub nas na Facebooku



Application:

AGA fittings are used for sealling and repairs of damaged water installations (also drink water), extending watter instalations and building. AGA clamps are used for repairing steel and polyethylene PE pipes

Technical features:

- working pressure : 16 bar
- maximum operating temperaturę 80°C
- diameters: from 3/8″ to 4″

Components of AGA Fittings:

- top and bottom part of clamp – black malleable iron
- sealing sleeve – EPDM
- connecting screws – carbon steel

National Technical Assessment: ITB-KOT-2020.1243 edition 1.

Range of application:

DN	Dimensions of pipes mm		Diameter range mm	
	Steel according to PE-EN 10255	Polyethylene PE according PN-EN 12201-2	Steel	PE
10	17,2	16	16,7 ÷ 17,5	16,7 ÷ 17,5
15	21,3	20	20,0 ÷ 21,8	20,0 ÷ 21,8
20	26,9	25	25,0 ÷ 27,3	25,0 ÷ 27,3
25	33,7	32	32,0 ÷ 34,2	32,0 ÷ 34,2
32	42,4	40	40,0 ÷ 42,9	40,0 ÷ 42,9
40	48,3	50	47,9 ÷ 50,0	47,9 ÷ 50,0
50	60,3	63	59,7 ÷ 63,0	59,7 ÷ 63,0
65	76,1	78	75,7 ÷ 76,6	75,7 ÷ 76,6
80	88,9	-	88,0 ÷ 89,5	-
100	114,3	-	113,1 ÷ 115,0	-

TÜVRheinland CERTYFIKOWANO
System zarządzania ISO 9001:2015
www.tuv.com ID 9105059711

tel. +48 29 746 33 80, +48 29 691 70 94
e-mail: biuro@agaflex.pl